

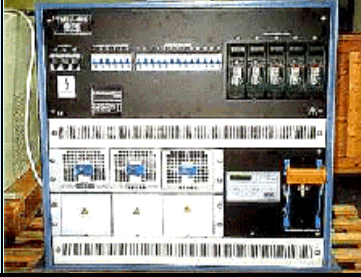
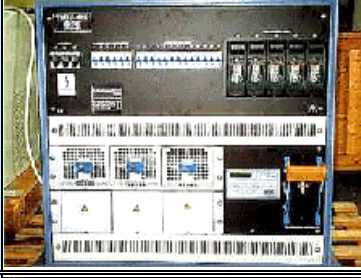




Powerstar High Current Telecom Power Supplies

System Type, Size / W x D x H /	System Current	Pictures	Built in Batteries	Rack System	Features
TS19-48D150-1Em/6U 483x400x1266 mm TS19-48D150-2Em/6U 483x400x266 mm TS19-48D150-3Em/6U 483x400x266 mm	48V, 50 A 48V, 100 A 48V, 150 A		—	N+1, 19 " rack system	<ul style="list-style-type: none"> - Voltage and current measuring - Failure signals with LED's - 3 alarm contacts (mains, system failure and batt. low) - Deep charge protection (option)
TS19-48D300-4Em/9U 483x400x1400 mm TS19-48D300-5Em/9U 483x400x400 mm TS19-48D300-6Em/9U 483x400x400 mm	48V, 200 A 48V, 250 A 48V, 300 A		—	N+1, 19 " rack system	<ul style="list-style-type: none"> - Voltage and current measuring - Failure signals with LED's - 3 alarm contacts (mains, system failure and batt. low) - Deep charge protection (option)
TMS2-48D300-1E/7c 800x500x800 mm TMS2-48D300-2E/7c 800x500x800 mm TMS2-48D300-3E/7c 800x500x800 mm	48V, 50 A 48V, 100 A 48V, 150 A		—	N+1, Battery rack system	<ul style="list-style-type: none"> - Microprocessor control system - Voltage and current measuring and failure signals with alphanumeric display - Programmable floating and fast charging - Programmable failure contacts (8)
TMS2-48D300-4E/7c 800x500x800 mm TMS2-48D300-5E/7c 800x500x800 mm TSMS2-48D300-6E/7c 800x500x800 mm	48V, 200 A 48V, 250 A 48V, 300 A		—	N+1, Battery rack system	<ul style="list-style-type: none"> - RS 232 and 422 communication line - Battery fuse - Deep charge protection (option) - Temperature compensated floating (option)
TMS1-48D300-1E/9s 600x500x1600 mm TMS1-48D300-2E/9s 600x500x1600 mm TMS1-48D300-3E/9s 600x500x1600 mm	48V, 50 A 48V, 100 A 48V, 150 A		—	N+1, rack system	<ul style="list-style-type: none"> - Microprocessor control system - Voltage and current measuring and failure signals with alphanumeric display - Programmable floating and fast charging - Programmable failure contacts (8)
TMS1-48D300-4E/9s 600x500x1600 mm TMS1-48D300-5E/9s 600x500x1600 mm TMS1-48D300-6E/9s 600x500x1600 mm	48V, 200 A 48V, 250 A 48V, 300 A		—	N+1, rack system	<ul style="list-style-type: none"> - RS 232 and 422 communication line - Battery fuse - Deep charge protection (option) - Temperature compensated floating (option)